


Data Sheet

Item	Contents		Criteria <b>(Adjustable)</b>
1	Model	HCX-D223V1	7S--80A working current
2	Voltage	Charging voltage	25.2V
3	Current	Maximal continuous charging current	20A
		Maximal continuous discharging current	80A
		Current consumption	≤50μA
4	Overcharge Protection	Over charge detection voltage	4.28V±0.025V
		Over charge detection delay time	0.5~2S
		Over charge release voltage	4.08V±0.05V
5	Over Discharge Protection	Over discharge detection voltage	3.00V±0.05V
		Over discharge detection delay time	50~200mS
		Over discharge release voltage	3.00V±0.1V
6	Over Current Protection	Over current detection voltage	0.1V~0.2V
		Over current detection current	200A±20A
		Detection delay time	5~20mS
		Release condition	Cut load, automatically recover
7	Short Circuit Protection	Detection condition	Exterior shot circuit
		Detection delay time	200~500uS
		Release condition	Cut load, automatically recover
8	Balance	Balance voltage for single cell	4.2V±0.025V
		Balance current for single cell	126mA±15mA
9	Resistance	Inner resistance	≤20mΩ
10	Temperature	Operating temperature range	0 ~ +85°C
		Storage temperature range	0 ~ +85°C
11	Size (L*W*T)	L120mm * W80mm * T25mm	

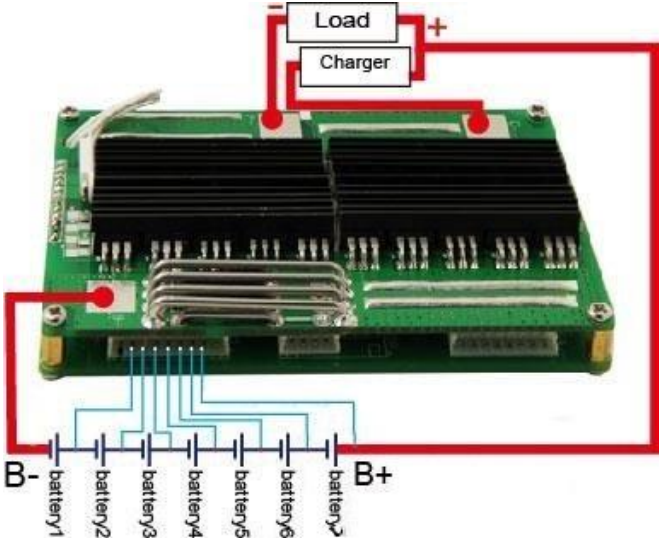

**Remarks:**

With E-Switch/ON-OFF Switch  
During charging and discharging,  
The Switch should be on(connected)

Charge, Discharge at different Port  
P+=B+/Charge+/Discharge+  
Ch- =Charge-  
P-= Discharge-

\*Note: Characteristics subject to change without notice.